


# Product data sheet

Status: 17.03.2021 | 18:06

Item no. 37328

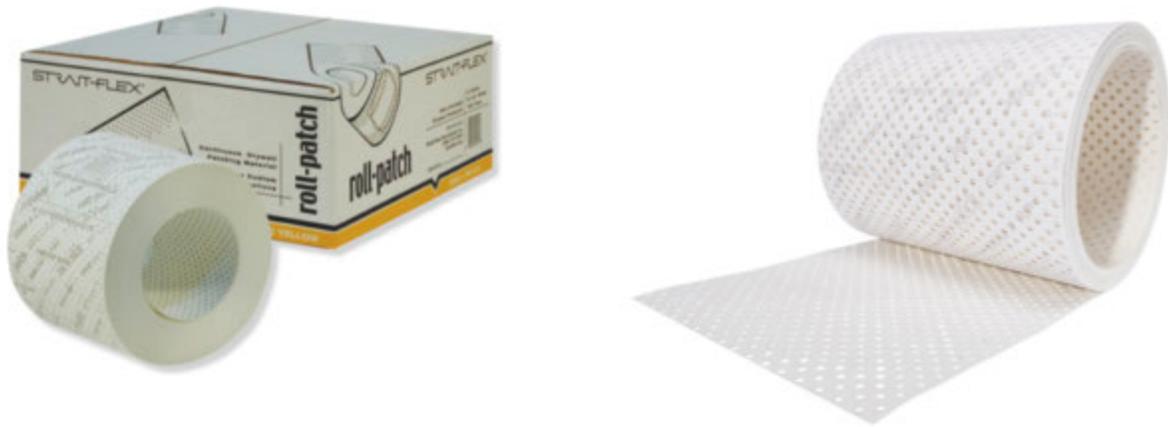

<b>Designation</b>	ROLL-PATCH 5.5" for drywall repairs;Repairpatch, rol
<b>Description</b>	<p>Flexible composite strip from the roll for flat filling. The roll material in a handy packaging allows an individual adjustment of the strip to the necessary size and thus reduces waste and costs.</p> <p>Excellent adhesion of the filler as a result of completely fibre-coated surface of the composite strip.</p> <p>For use on gypsum plasterboards in the drywall construction, for repair and restoration of damage, e.g. in gypsum plasterboard.</p>
<b>Line of Business</b>	Wire corner bead
<b>Productclass</b>	Composite profiles
<b>Productgroup</b>	Profiles
<b>Plaster thickness</b>	1,0 mm
<b>Material thickness</b>	0,6 mm
<b>Product length</b>	610,0 cm
<b>Product width</b>	140,0 mm
<b>Revision</b>	Putty the composite clean all over.
<b>Application Areas</b>	For the use on gypsum plasterboards in the drywall construction, for the repair and for the renovation of damages, for example in gypsum plasterboards.
<b>Underground</b>	The underground has to be sustainable, solid, clean and dry.
<b>Treatment</b>	<ol style="list-style-type: none"><li>1. Cut the stripe to length and cut the profile corner in a 45° angle.</li><li>2. Put the suitable filling compound on the underground or directly on the unprinted side of the profile and apply the profile to the edge with the printed side outwards.</li><li>3. Fixing with the hands under constant pressure.</li><li>4. Peel the excess material with a trowel and use this for puttying the stripe. After the drying of the filling compound, the edge can be grinded.</li><li>5. With that, the treatment of the composite is finished. Depending on the required surface quality (Q3-Q4), additional filler plies can be necessary.</li></ol> <p>Please notice the technical datasheet of the used filling compound. Don't use under +5° C air-, object- and drying temperature.</p>
<b>Consumption</b>	The rolled products can be cut on the individual length of the edge on the object and reduce by this waste and costs. The consumption of filling compound depends on the structure of the surface and the absorbency of the underground as well as the qualities of the filling compound. Compared to conventional filler profiles, the material input becomes reduced.

**PROTEKTORWERK**  
Florenz Maisch GmbH & Co. KG  
Postfach 1420, D-76554 Gaggenau  
Viktoriastr. 58, D-76571 Gaggenau

Tel. +49 7225 977-0  
Fax +49 7225 9 77-111  
info@protektor.com  
www.protektor.com



# Product data sheet

Status: 17.03.2021 | 18:06

Item no. 37328

<b>Tool</b>	The treatment takes place with all common drywall tools.
<b>Packaging Unit</b>	6 ROL / 24 CAR
<b>Storage</b>	Store it cold, dry and protected from moisture.
<b>Disposal</b>	The waste of the composite stripes can be disposed with the residual waste.
	Notice the additional treatment notes and the datasheets of the used filling compound.

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!

**PROTEKTORWERK**  
Florenz Maisch GmbH & Co. KG  
Postfach 1420, D-76554 Gaggenau  
Viktoriastr. 58, D-76571 Gaggenau

Tel. +49 7225 977 - 0  
Fax +49 7225 9 77 - 111  
info@protektor.com  
www.protektor.com

